

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

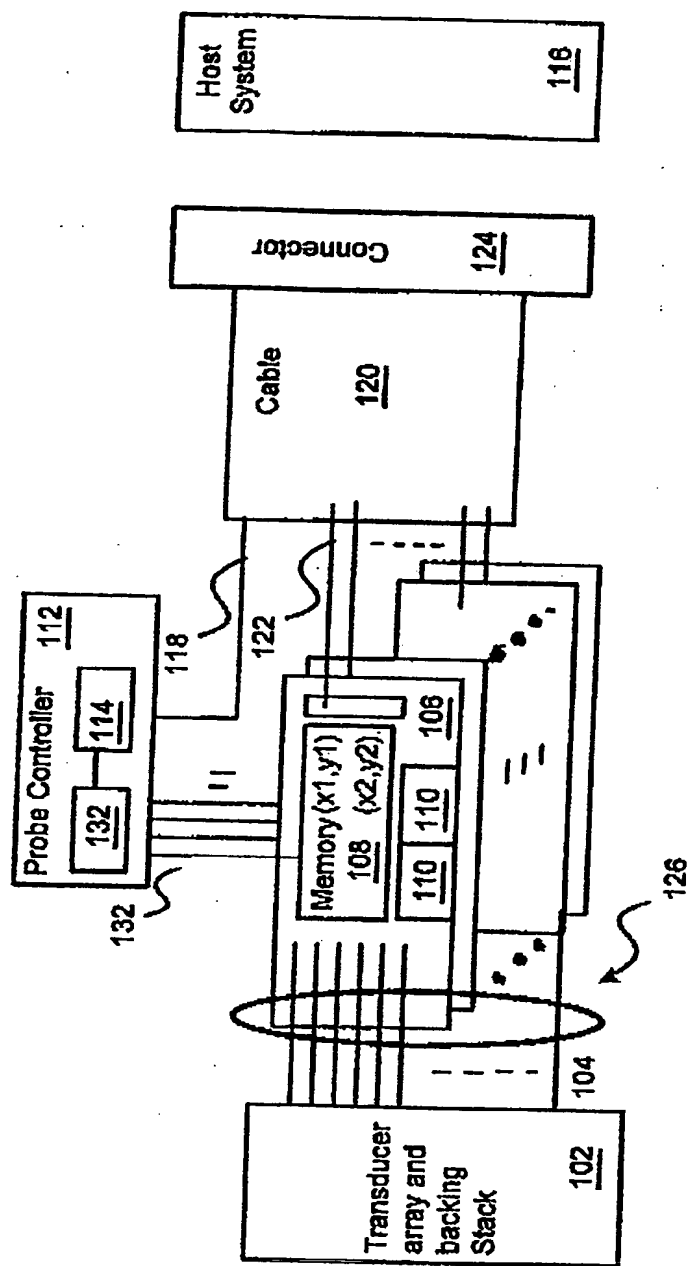


Figure 1

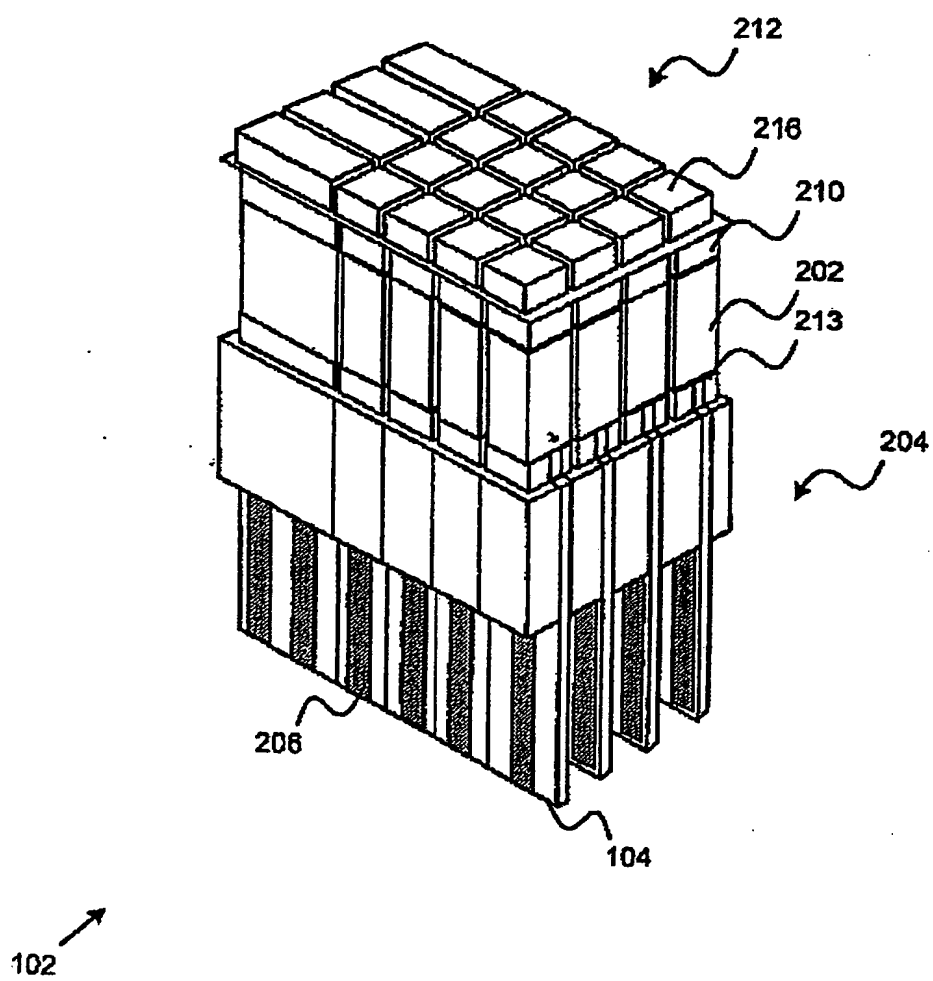


Figure 2


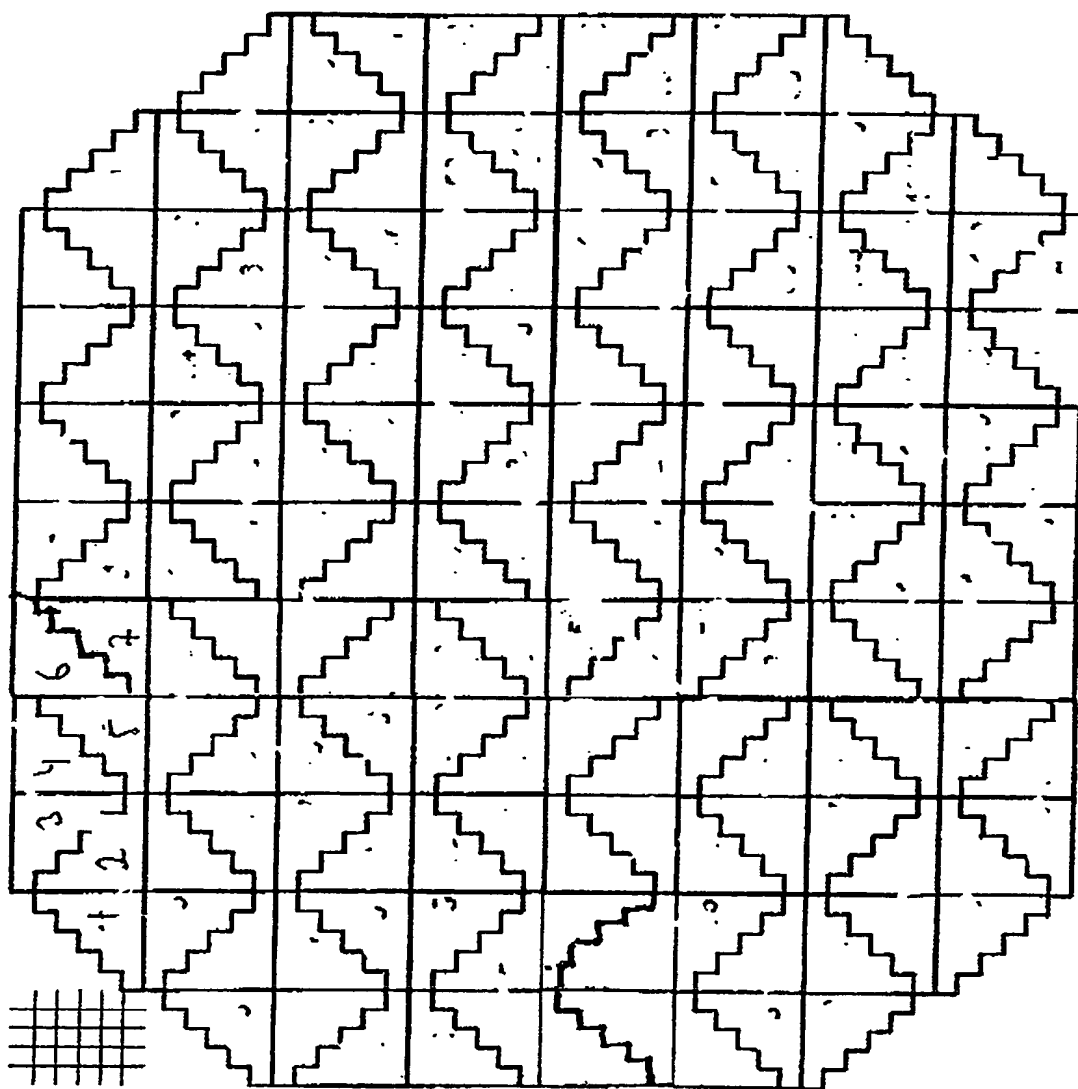


Figure 3

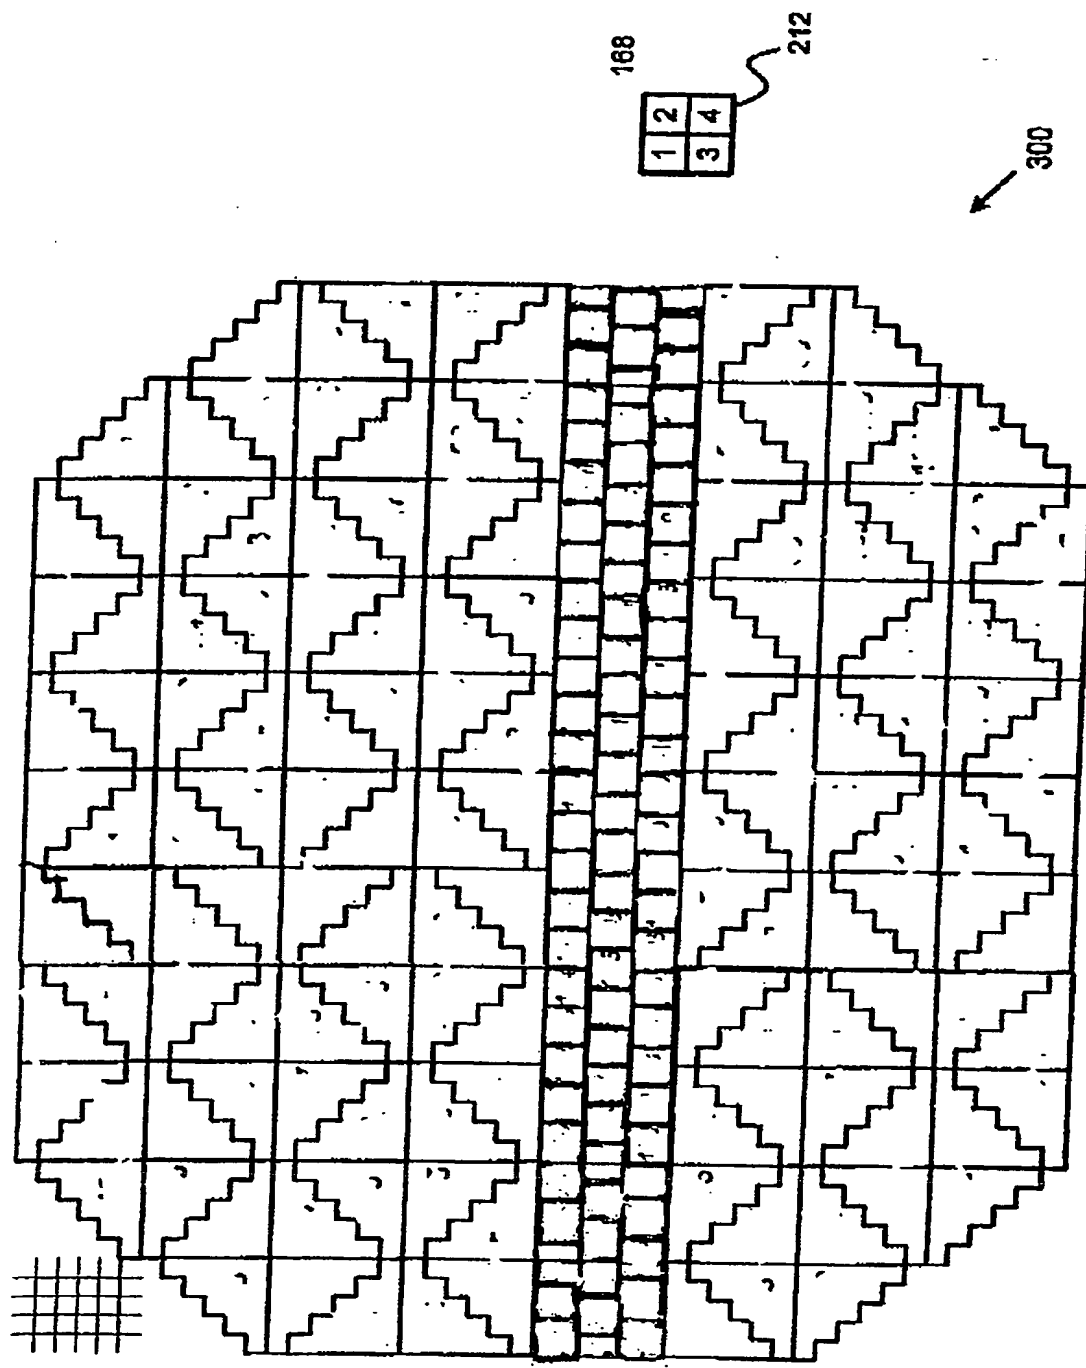


Figure 4

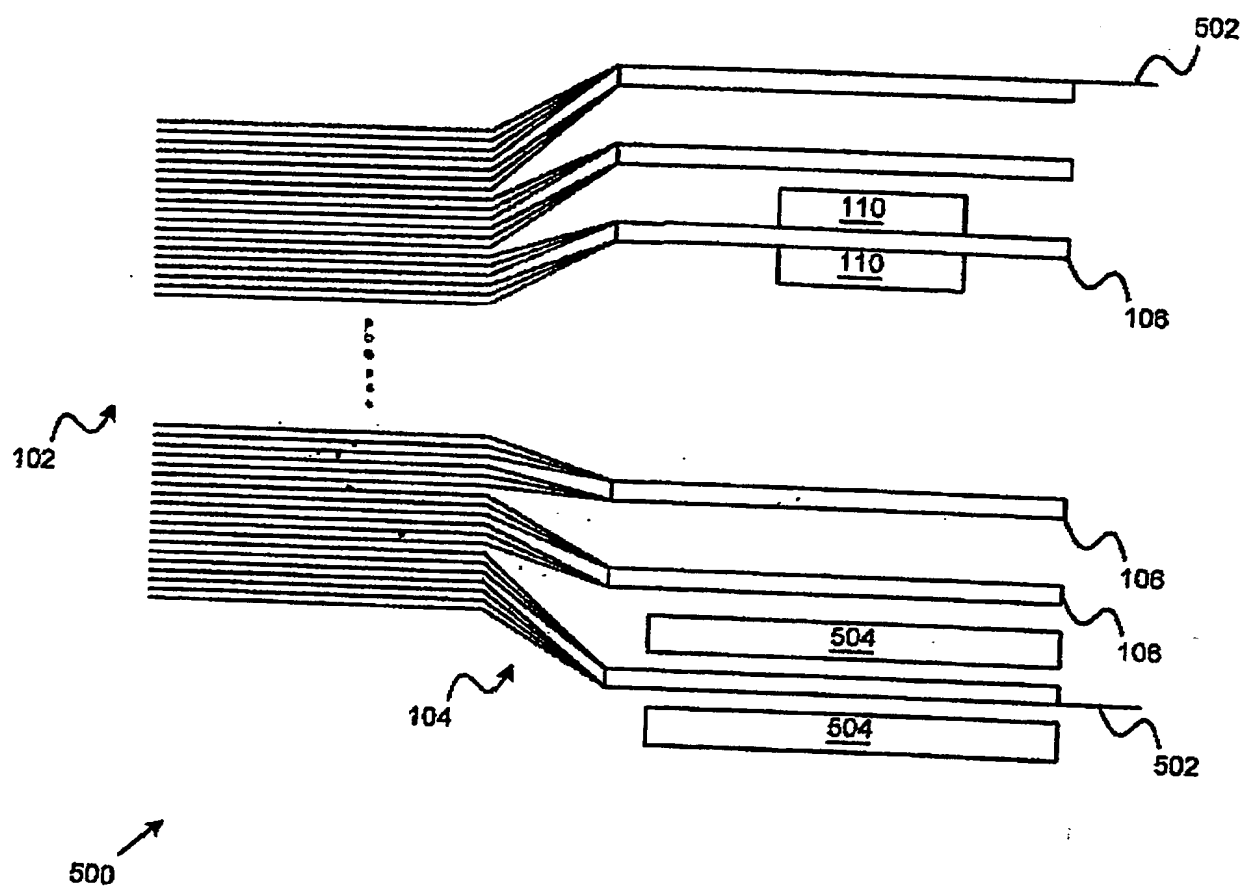


Figure 5

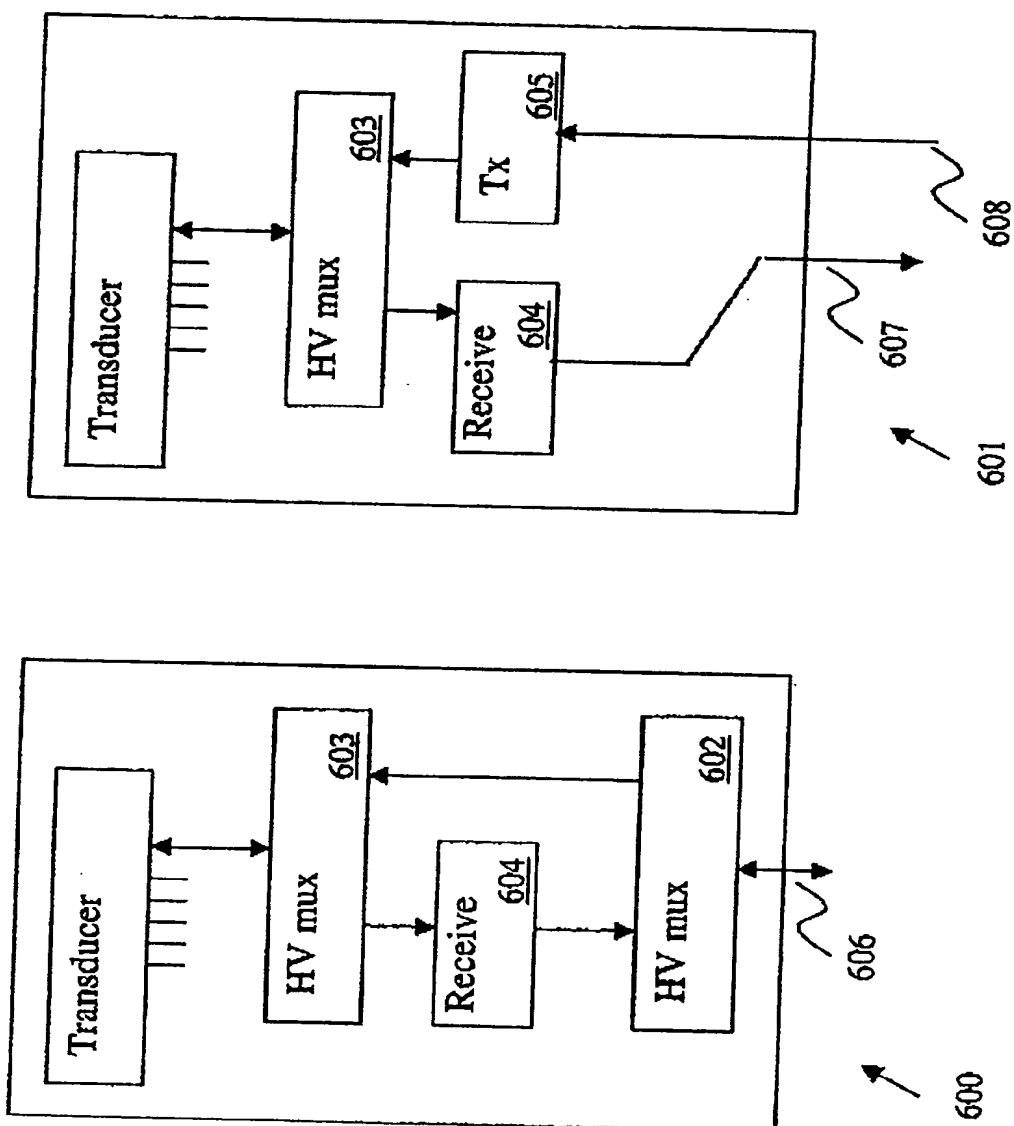


Figure 6



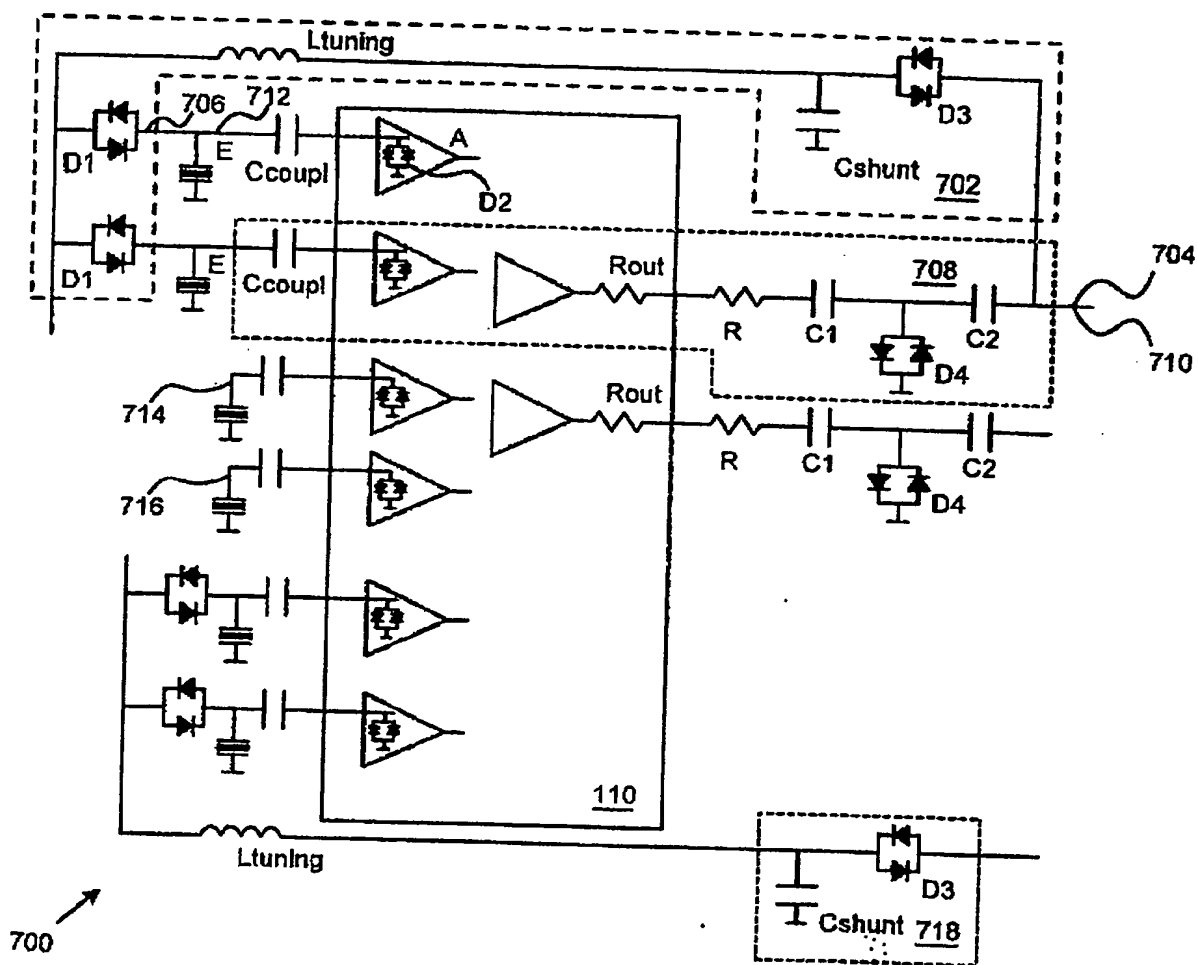


Figure 7

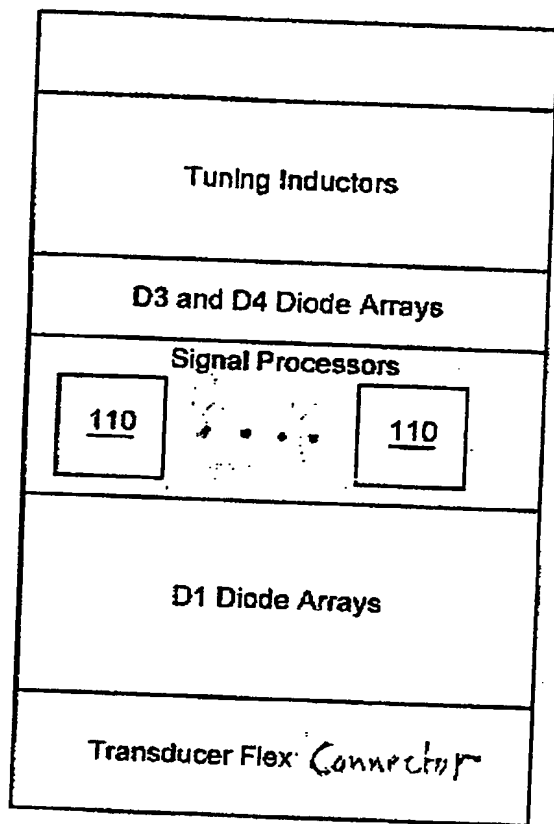


802

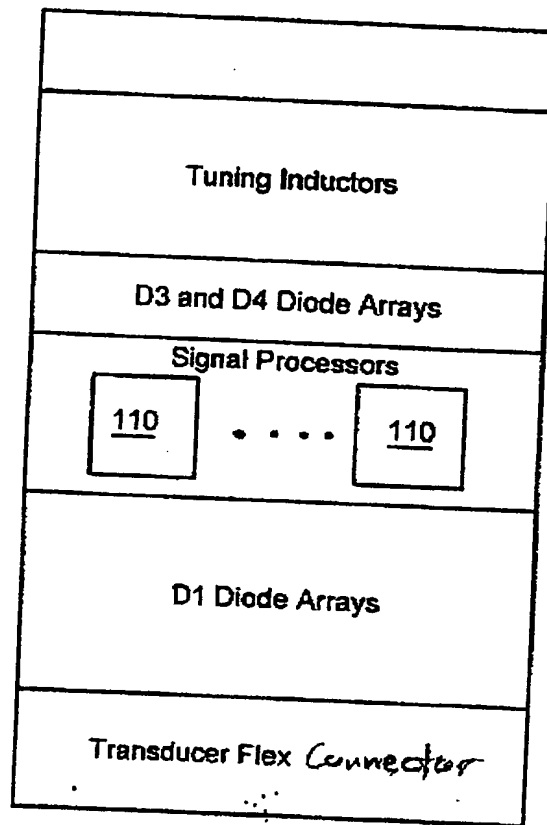


804


Figure 8

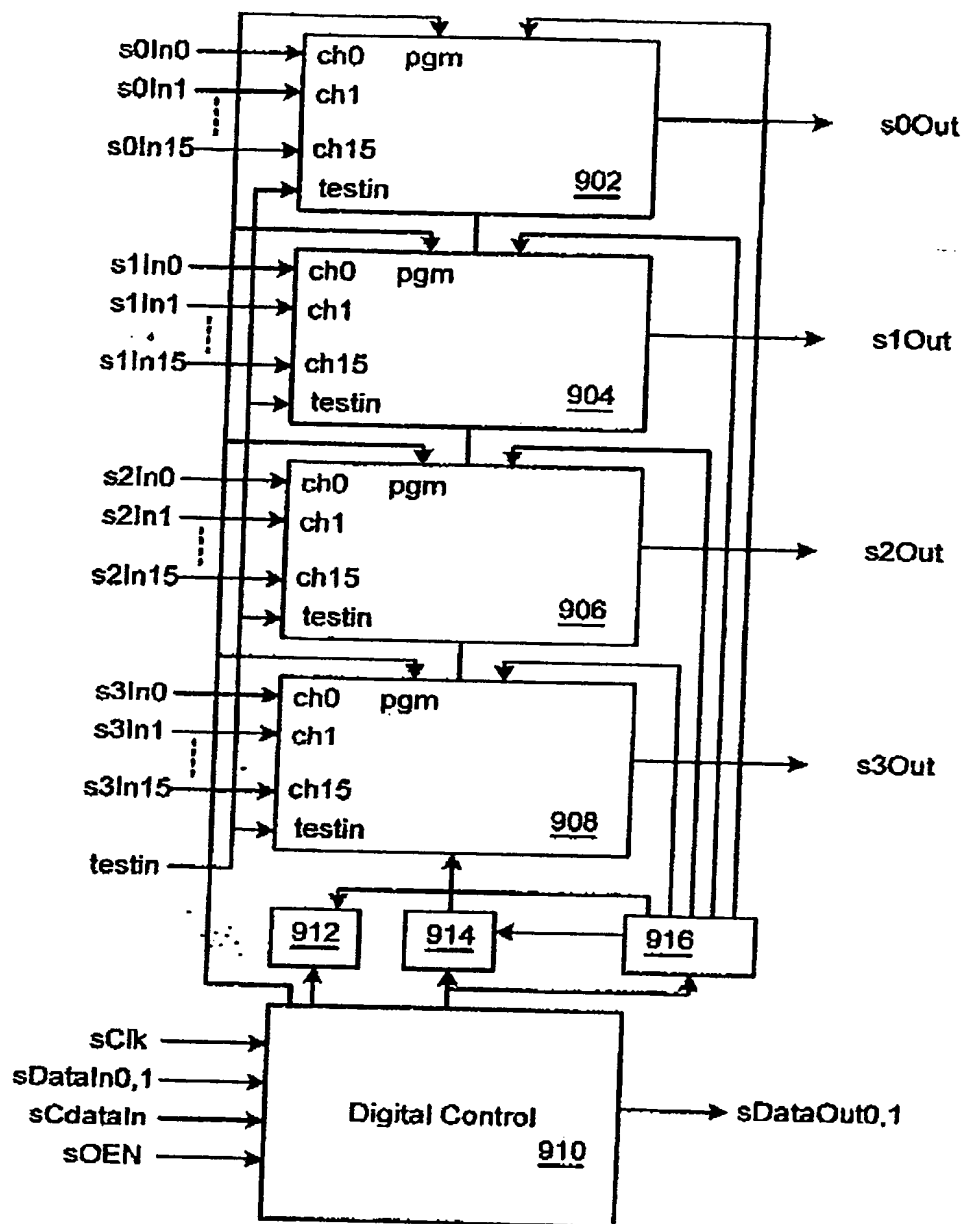

900

Figure 9

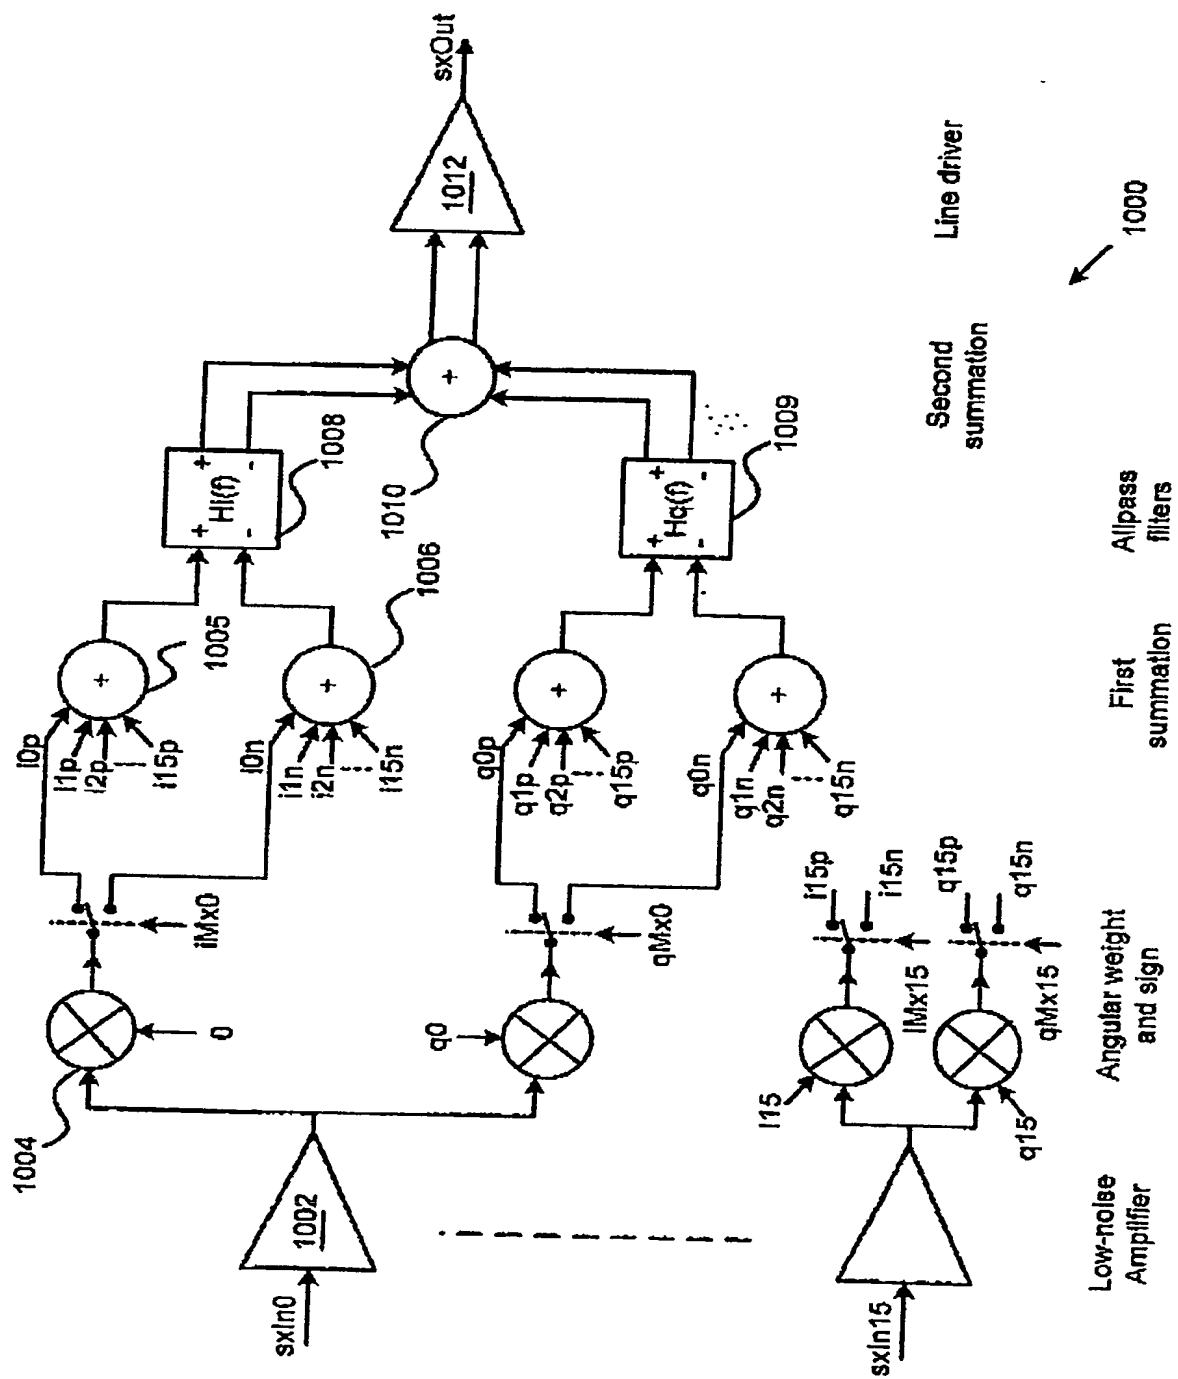

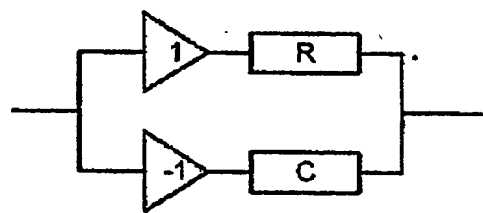

1906 ↗

Figure 11

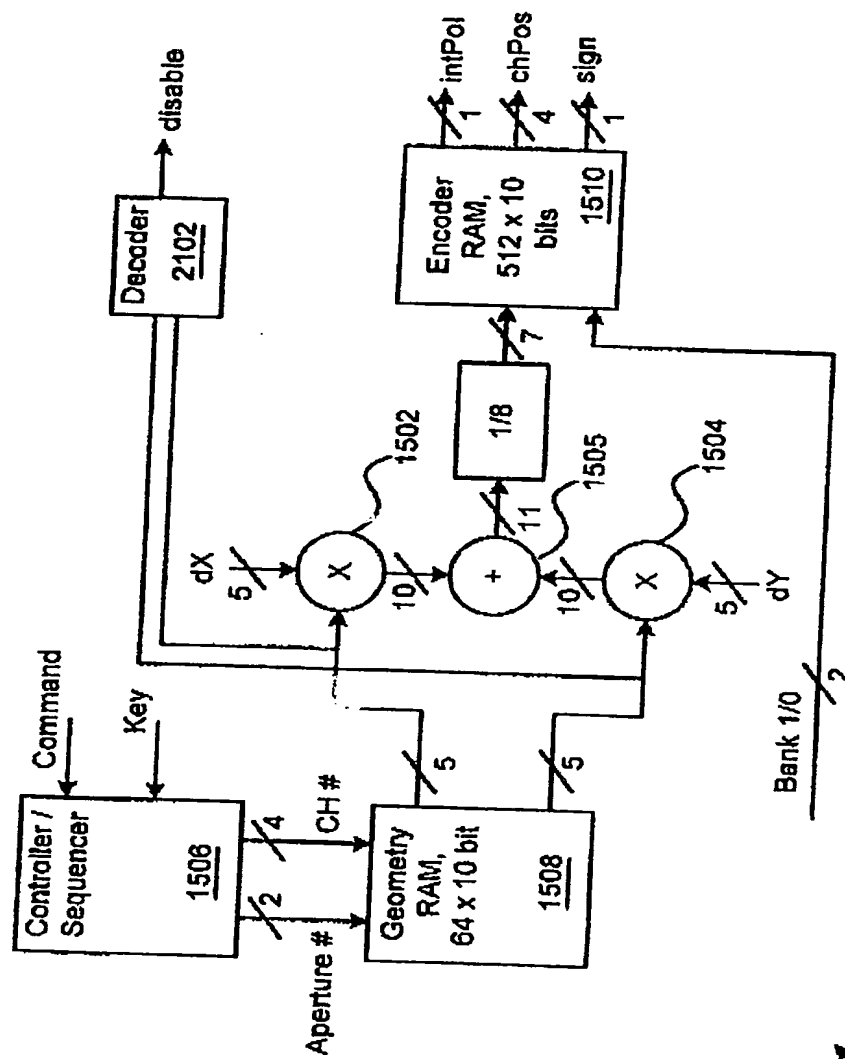


Figure 12

2100

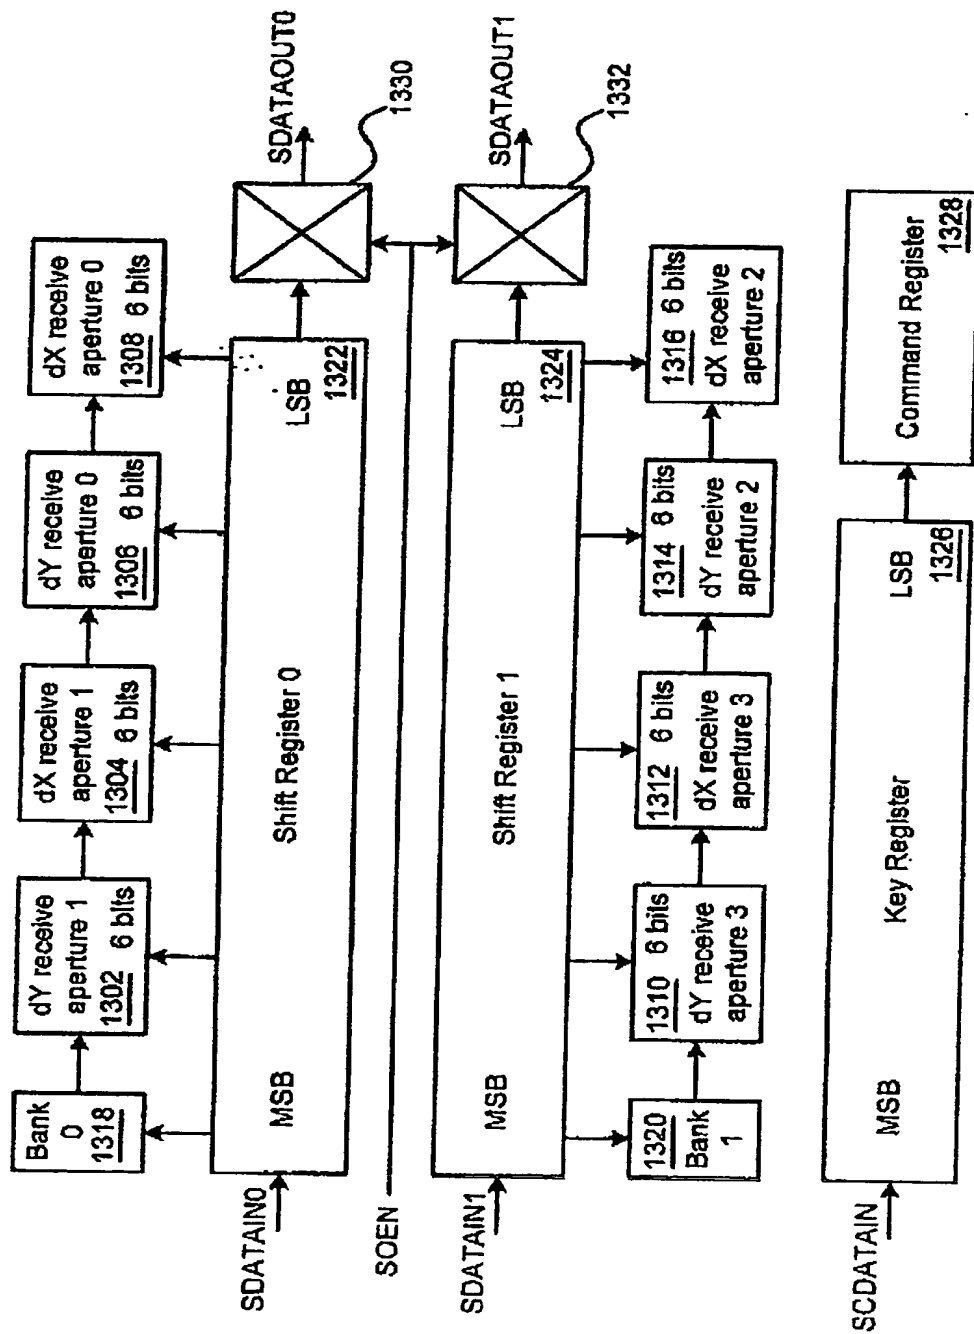


Figure 13

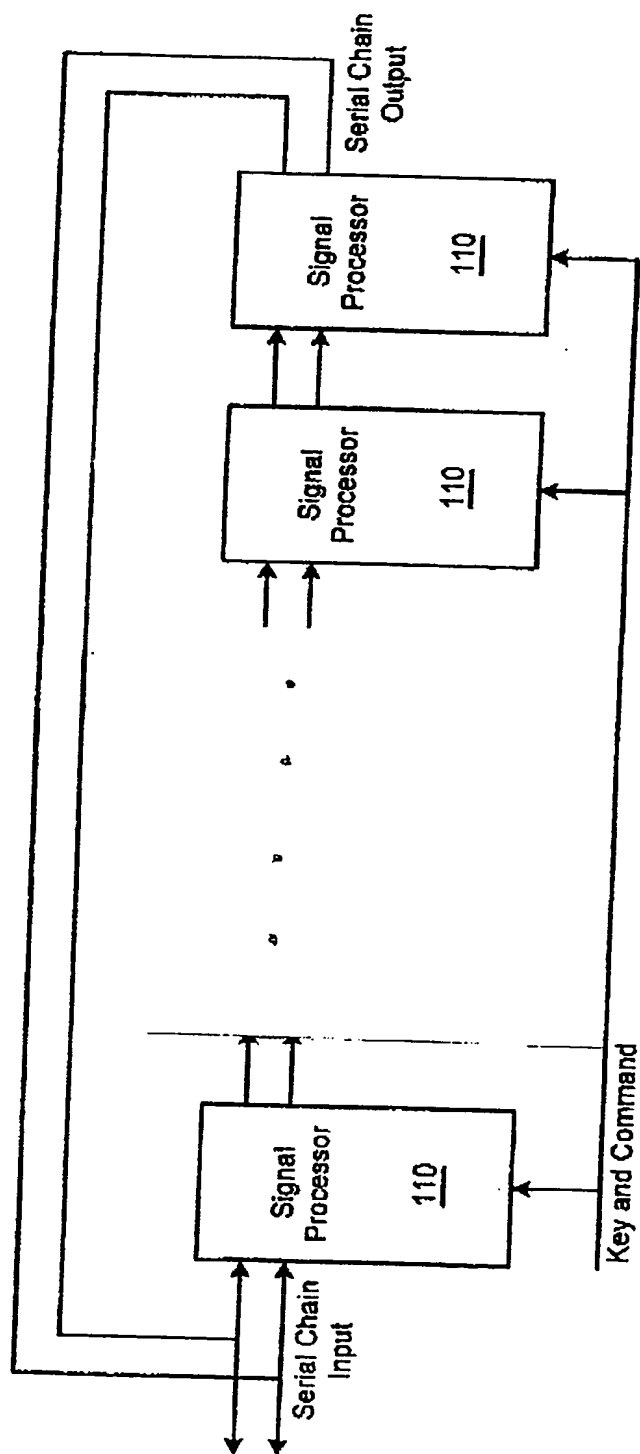


Figure 14

1400

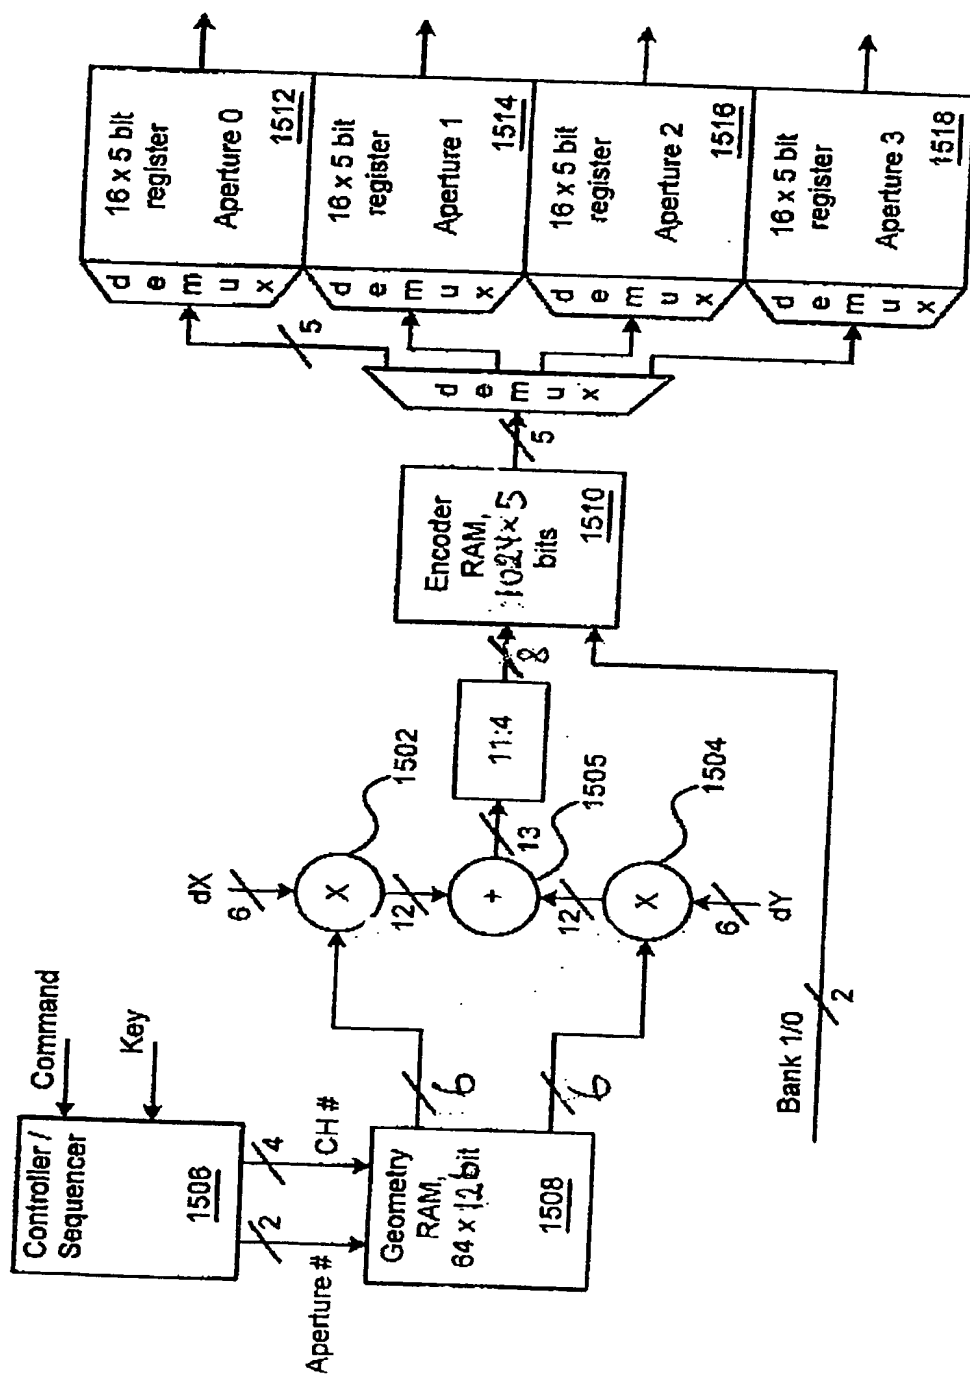


Figure 15


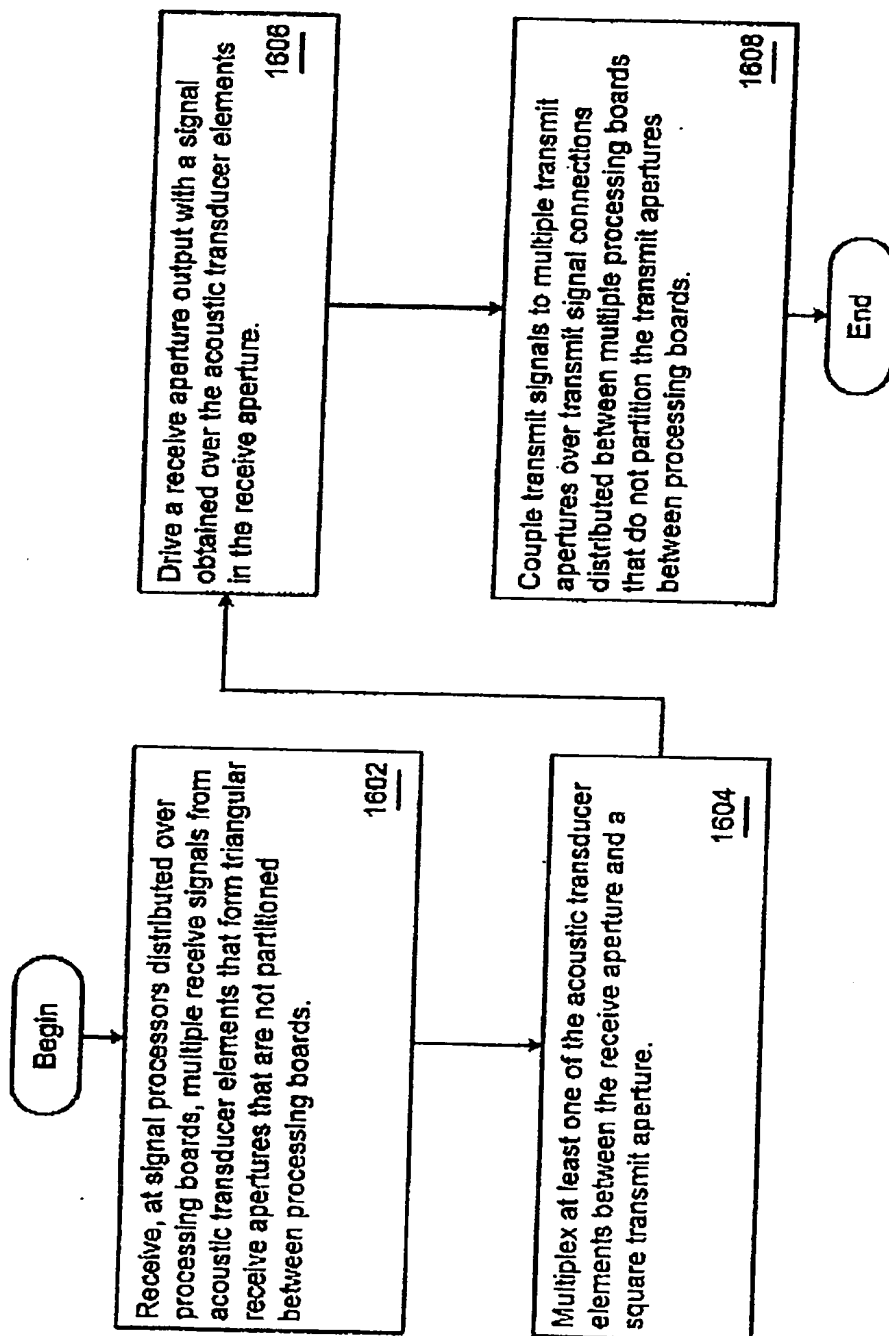


Figure 16

FIGURE 17

Begin
Receive directional parameters for received sub-apertures from a host system at cache memory controller. <u>1702</u>
Transfer the directional parameters to multiple signal processors on multiple processing boards. <u>1704</u>
Couple, to a first signal processor, receive signals arising form a receive sub-aperture. <u>1706</u>
Retrieve, from a cache memory, directional parameters for the receive sub-aperture. <u>1708</u>
Determine a beamforming delay derived from the directional parameters for the transducer elements in the receive sub-aperture. <u>1710</u>
Apply the delay to the receive signal from teach respective transducer element. <u>1712</u>
End

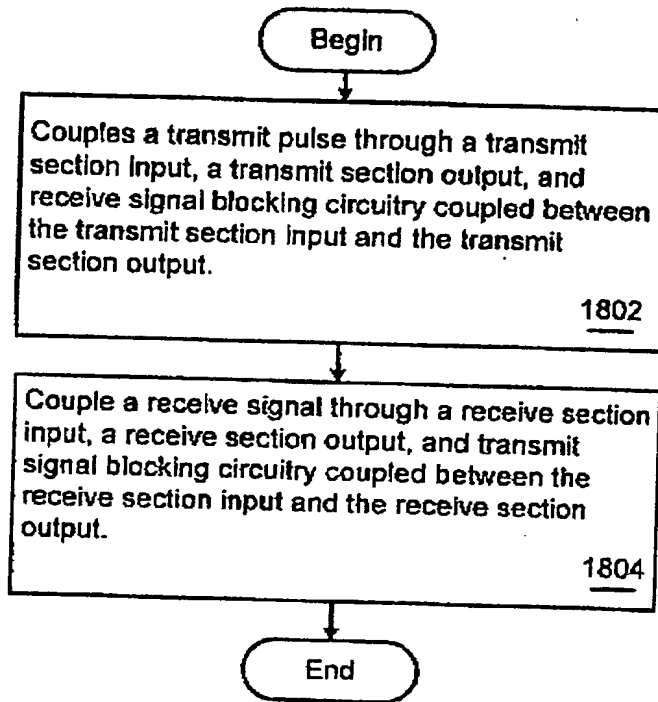

1800

Figure 18

